


TECHNICAL SPECIFICATIONS AK 565 K

DIMENSIONS	
Chassis	Track-mounted chassis
Total weight (kg)	29000
Transport length (mm)	8670
Transport width (mm)	3000
Transport height (mm)	3390 / 3590 (with off-road chassis)
Length (mm)	13750
Width (mm)	3000
Height (mm)	5090 / 5290 (with off-road chassis)
ENGINE	
Engine type	Diesel engine
Manufacturer	MTU 6R 1300
Emissions standard	Stage V EPA Tier 4f EIIIA
Motor power (kW / hp)	390 / 530
Tank capacity (l)	600
Torque (Nm)	2600 2460 (EIIIA) at 1300 rpm
DISCHARGE CONVEYOR	
Width (mm)	1500
Length (mm)	7500
Belt speed (m/s)	2
Discharge height (mm)	5090
FLAIL DRUM	
Width (mm)	1750
Diameter (mm)	1120
Rotational speed (rpm)	850 - 1000 (depending on engine speed)
Number of flails / teeth	36
FEED HOPPER	
Fill width (mm)	2670
Loading height (mm)	2230 / 2430 (with off-road chassis)
Infeed height (mm)	538



Working position

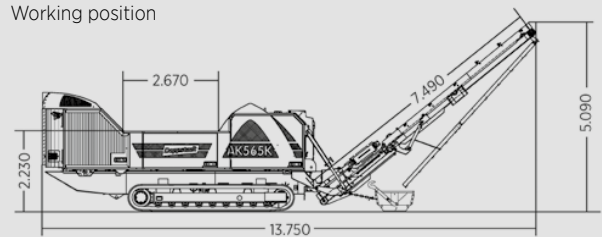

Transport position

