


# TECHNICAL SPECIFICATIONS AK 565

DIMENSIONS	
Chassis	2-axle trailer
Total weight (kg)	19000
Transport length (mm)	9770 or 9850
Transport width (mm)	2500
Transport height (mm)	3960 or 3850
Length (mm)	11780 or 13250
Width (mm)	2500
Height (mm)	3000 or 4150
ENGINE	
Engine type	Diesel engine
Manufacturer	MTU 6R 1300
Emissions standard	Stage V   EPA Tier 4f   EIIIA
Motor power (kW / hp)	390 / 530
Tank capacity (l)	450 or 600* (*optional)
Torque (Nm)	2600   2460 (EIIIA) at 1300 rpm
DISCHARGE CONVEYOR	
Width (mm)	1800
Length (mm)	4000 or 6000* (*optional)
Belt speed (m/s)	2
Discharge height (mm)	3000 or 4150* (*optional)
FLAIL DRUM	
Width (mm)	1750
Diameter (mm)	1120
Rotational speed (rpm)	850 - 1000 (depending on engine speed)
Number of flails / teeth	36
FEED HOPPER	
Fill width (mm)	2670
Loading height (mm)	2180
Infeed height (mm)	538



Working position

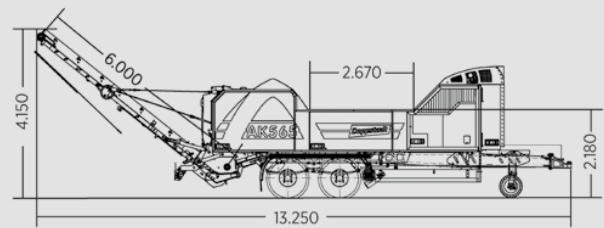

Transport position

