


# TECHNICAL SPECIFICATIONS AK 640 K

DIMENSIONS	
Chassis	Track-mounted chassis
Total weight (kg)	32500
Transport length (mm)	10020
Transport width (mm)	3000
Transport height (mm)	3390 / 5290 (with off-road chassis)
Length (mm)	15910
Width (mm)	3000
Height (mm)	5090 / 5290 (with off-road chassis)
ENGINE	
Engine type	Diesel engine
Manufacturer	MTU 6R 1500
Emissions standard	Stage V   EPA Tier 4f   EIIIA
Motor power (kW / hp)	480 / 652   460 / 625 (EIIIA)
Tank capacity (l)	750
Torque (Nm)	3100   2900 (EIIIA) at 1300 rpm
DISCHARGE CONVEYOR	
Width (mm)	1500
Length (mm)	7500
Belt speed (m/s)	2
Discharge height (mm)	5090
FLAIL DRUM	
Width (mm)	1750
Diameter (mm)	1120
Rotational speed (rpm)	970 - 1140 (depending on engine speed)
Number of flails / teeth	36
FEED HOPPER	
Fill width (mm)	3500
Loading height (mm)	2220 / 2420 (with off-road chassis)
Infeed height (mm)	538



Working position

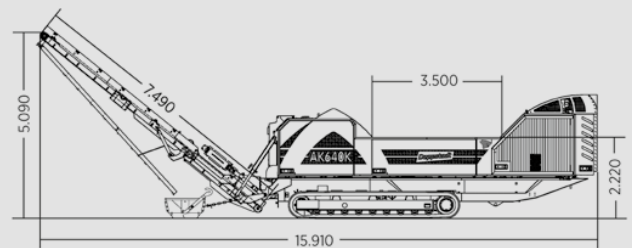

Transport position

