



FASTRAK

SERIES



FASTRAK

AVAILABLE DECK SIZES

48" & 54"



FASTRAK SDX

AVAILABLE DECK SIZES

48" - 60"

FASTRAK



Welded Steel Deck

Durable 10 ga. welded fabricated steel

Fabricated Frame for Durability

1.5" x 3.0" steel frame making it one of the toughest and most durable in its class

Easy Serviceability


Flip-up seat pan and removable floor pan and toolless removable pulley covers makes maintenance easy and simple

SmoothTrak™ Steering

Precision control to help trim and maneuver easily around obstacles. You will fully understand SmoothTrak™ steering when you drive ours.

Foot Operated Deck Lift

Easily adjust the deck height between 1.5" - 4.5" with less effort than hand-operated levers found on other brands

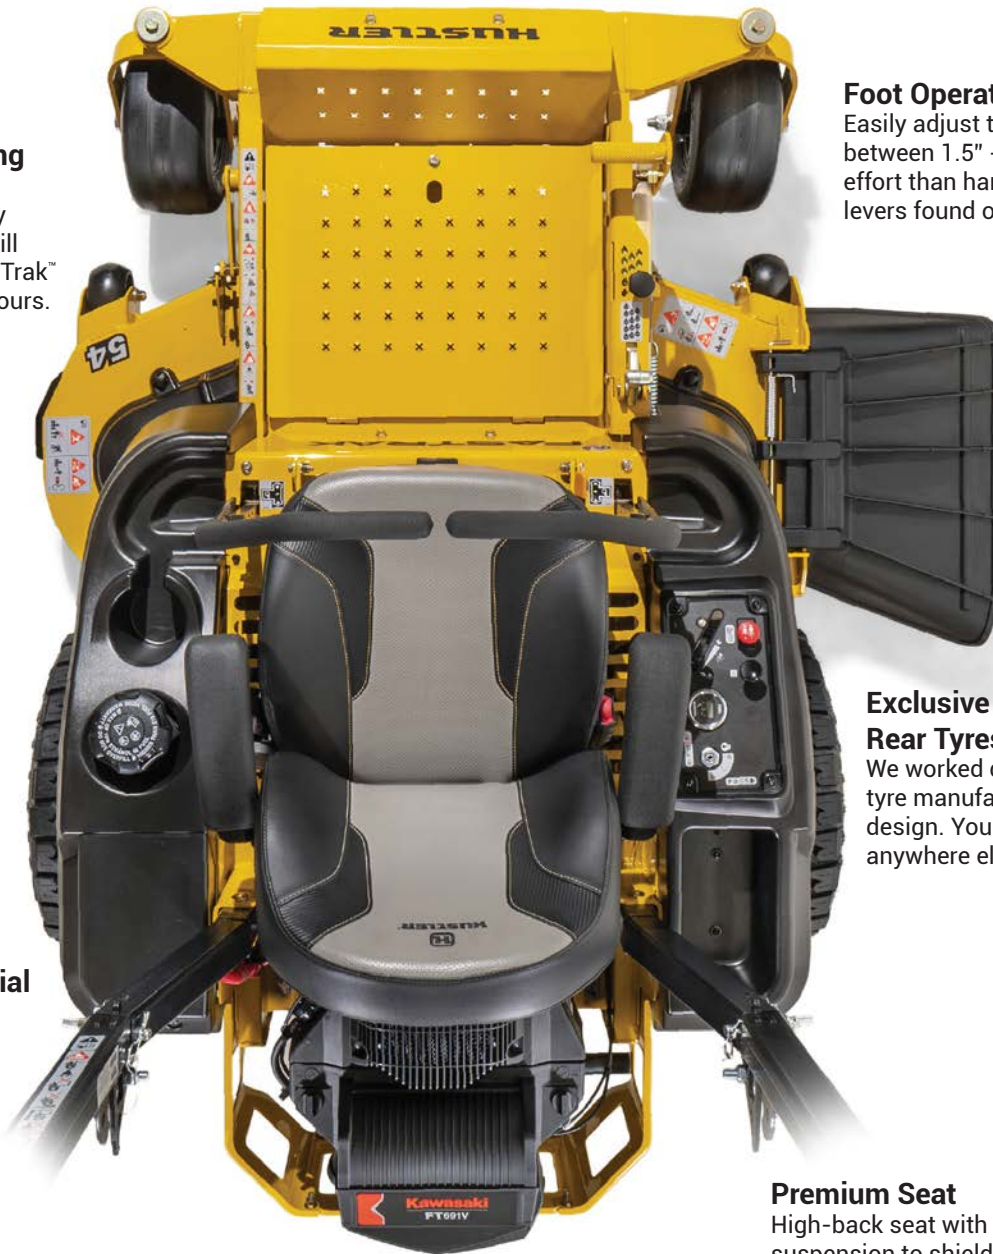

Serviceable Commercial Grade Transmission

Hydro-Gear® ZT3200

Exclusive BigBite™ Rear Tyres

We worked directly with the tyre manufacturer on this design. You will not find them anywhere else.

Premium Seat

High-back seat with suspension to shield the operator from bumps and EVC cushion to take pressure off tail bone and lower back

Commercial-Grade Kawasaki® FT Engine

With Vortical Air Filtration assists with cleaning debris that extends engine life





UPGRADES FOUND ON THE FASTRAK SDX

FASTRAK SDX

- ✔ **Extra High-Back Suspension Seat**
Higher backrest and more bolstered back cushion
- ✔ **Kawasaki® FX Engine**
Full Commercial remote canister air cleaner
- ✔ **Larger Transmissions**
Hydro-Gear® ZT3400



FASTRAK ACCESSORIES

- ▶ Mulch kit
- ▶ 2-bag powered bagger (7.2 bushels)
- ▶ Steering lever extension kit
- ▶ FlexForks®

LIMITED WARRANTY
4 YEAR | **1000** HOUR

FASTRAK

FASTRAK SDX

ENGINE	
Manufacturer	Kawasaki® FT series Kawasaki® FX series
HP	48" & 54" deck: 22HP - FT691 (Per SAE J1995) 48", 54" deck: 22HP - FX691 (Per SAE J1995) 60" deck: 23.5HP - FX730 (Per SAE J1995)
Displacement	726cc
Cooling	Air cooled
Engine Warranty	3 year
DRIVE SYSTEM	
Type	Dual hydrostatic
Transmission	Hydro-Gear® ZT3200 Hydro-Gear® ZT3400
Speed	Up to 13kph Up to 14kph
Parking Brakes	Patented automatic
DECKS	
Cutting Width	Side discharge: 48", 54" Side discharge: 48", 54", 60"
Cutting Height	1.5" - 4.5"
Deck Lift	Foot operated
Depth	5"
Blades	3
Blade Length	48" deck: 16.50" 54" deck: 18.50" 48" deck: 16.50" 54" deck: 18.50" 60" deck: 20.50"
Blade Tip Speed	48" deck: 18,600 54" deck: 18,900 48" deck: 18,600 54" deck: 18,900 60" deck: 18,400
Spindles	Aluminium with 1" shafts and sealed ball bearings
Drive	Electric PTO Clutch
Construction	Fabricated 10 ga.
Spindle Mounts	Reinforced 11 ga.
Impact/Trim Areas	11 ga. formed channel with rolled edge
CONSTRUCTION	
Frame	1.5" x 3" steel tubing
Front Axle	Fabricated with sealed ball bearings
Front Caster Wheels	Heavy duty ball bearings, greasable
Front Caster Forks	Fabricated 3/8" steel
GENERAL	
Seat	High-back suspension seat Extra High-back suspension seat
Fuel Capacity	18.9 Litres
Cupholder	Yes
Front Tyre	48": 13 x 5 - 6 54": 13 x 6.5 - 6 48": 13 x 5 - 6 54", 60": 13 x 6.5 - 6
Drive Tyre	48" deck: 23 x 9.5 - 10 BigBite™ 54" deck: 23 x 11 - 10 BigBite™ 48" deck: 23 x 9.5 - 10 BigBite™ 54" & 60" deck: 23 x 11-10 BigBite™
DIMENSIONS	
Weight	48" deck: 379kg 54" deck: 383kg 48" deck: 391kg 54" deck: 404kg 60" deck: 415kg
Height	1.24m 1.74m w/ROPS up
Length	48" deck: 1.87m 54" deck: 1.89m 60" deck: 1.93m
Width w/Chute	48" deck: 1.25m 54" deck: 1.40m 48" deck: 1.25m 54" deck: 1.40m 60" deck: 1.55m
Tyre Width	48" deck: 1.19m 54" deck: 1.32m 48" deck: 1.19m 54" & 60" deck: 1.32m
Trim Side	48" deck: 0.03m 54" deck: 0.08m 48" deck: 0.03m 54" deck: 0.08m 60" deck: 0.15m
PRODUCTIVITY*	
Acres per hour	48" deck: 3.10 54" deck: 3.48 48" deck: 3.49 54" deck: 3.93 60" deck: 4.36



VISIT HUSTLERMOWERS.CO.NZ

and try our compare products tool

Specifications are subject to change without notice

* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain