

TRAKPACTOR 260

The Powerscreen® Trakpactor 260 horizontal shaft impactor is a compact track mobile crusher designed for the recycling and demolition markets. Capable of processing a wide range of material at a high output, the plant is versatile, easy to operate and fuel efficient due to its direct drive system.

Featuring the Powerscreen® Trakpactor 260 fixed hammer horizontal impactor, the plant offers users both excellent reduction and a high consistency of product shape alongside key features such as hydraulic overload protection.

Features & Benefits

- Replaceable tine bar cartridge style grizzly feeder
- Load management system to control feeder speed
- Crusher chamber: Patented hydraulic overload protection and adjustment system.
- 4 Bar rotor and twin apron design
- Economical to operate with HPTO clutch & highly fuel efficient direct drive system
- Crusher speed and conveyor height controlled with user-friendly PLC system
- Modular conveyor with raise/lower facility to aid clearance of rebar
- Dust suppression system
- Fitted with Powerscreen Pulse Telematics system

Options

- Full and half size chrome, martensitic and ceramic blow bars
- 4 full size hammers in lieu of 2 full & 2 half hammers
- Various tine bar apertures
- Grizzly blanking mats
- Wire mesh for underscreen
- Single pole/twin pole magnet
- Belt scale
- Bypass conveyor
- Electric refuelling pump
- Plant lighting
- Radio remote control
- Hot/cold climate oil kits
- Blow bar removal tool
- Control panel positive pressurisation
- Fully independent under crusher vibrating pan feeder

Applications


- Blasted rock
- River rock
- C & D waste
- Foundry waste
- Processed ores
- Processed minerals

TRAKPACTOR 260

Weight (Est)	27,000kg (59,525lbs) with bypass conveyor & magnet
Transport width	2.5m (8'2")
Transport length	13.4m (43'10")
Transport height	3.2m (10'6")
Working width	4m (13'1") with bypass conveyor
Working length	13.4m (43'10")
Working height	3.6m (11'10")



*Depends on application
Engines are available that are certified to US EPA and EU off road diesel emission standards. Talk to your dealer about possible certification options (i.e. Tier 3/Stage 3A, Tier 4/Stage 3B, Tier 4F / Stage 4).

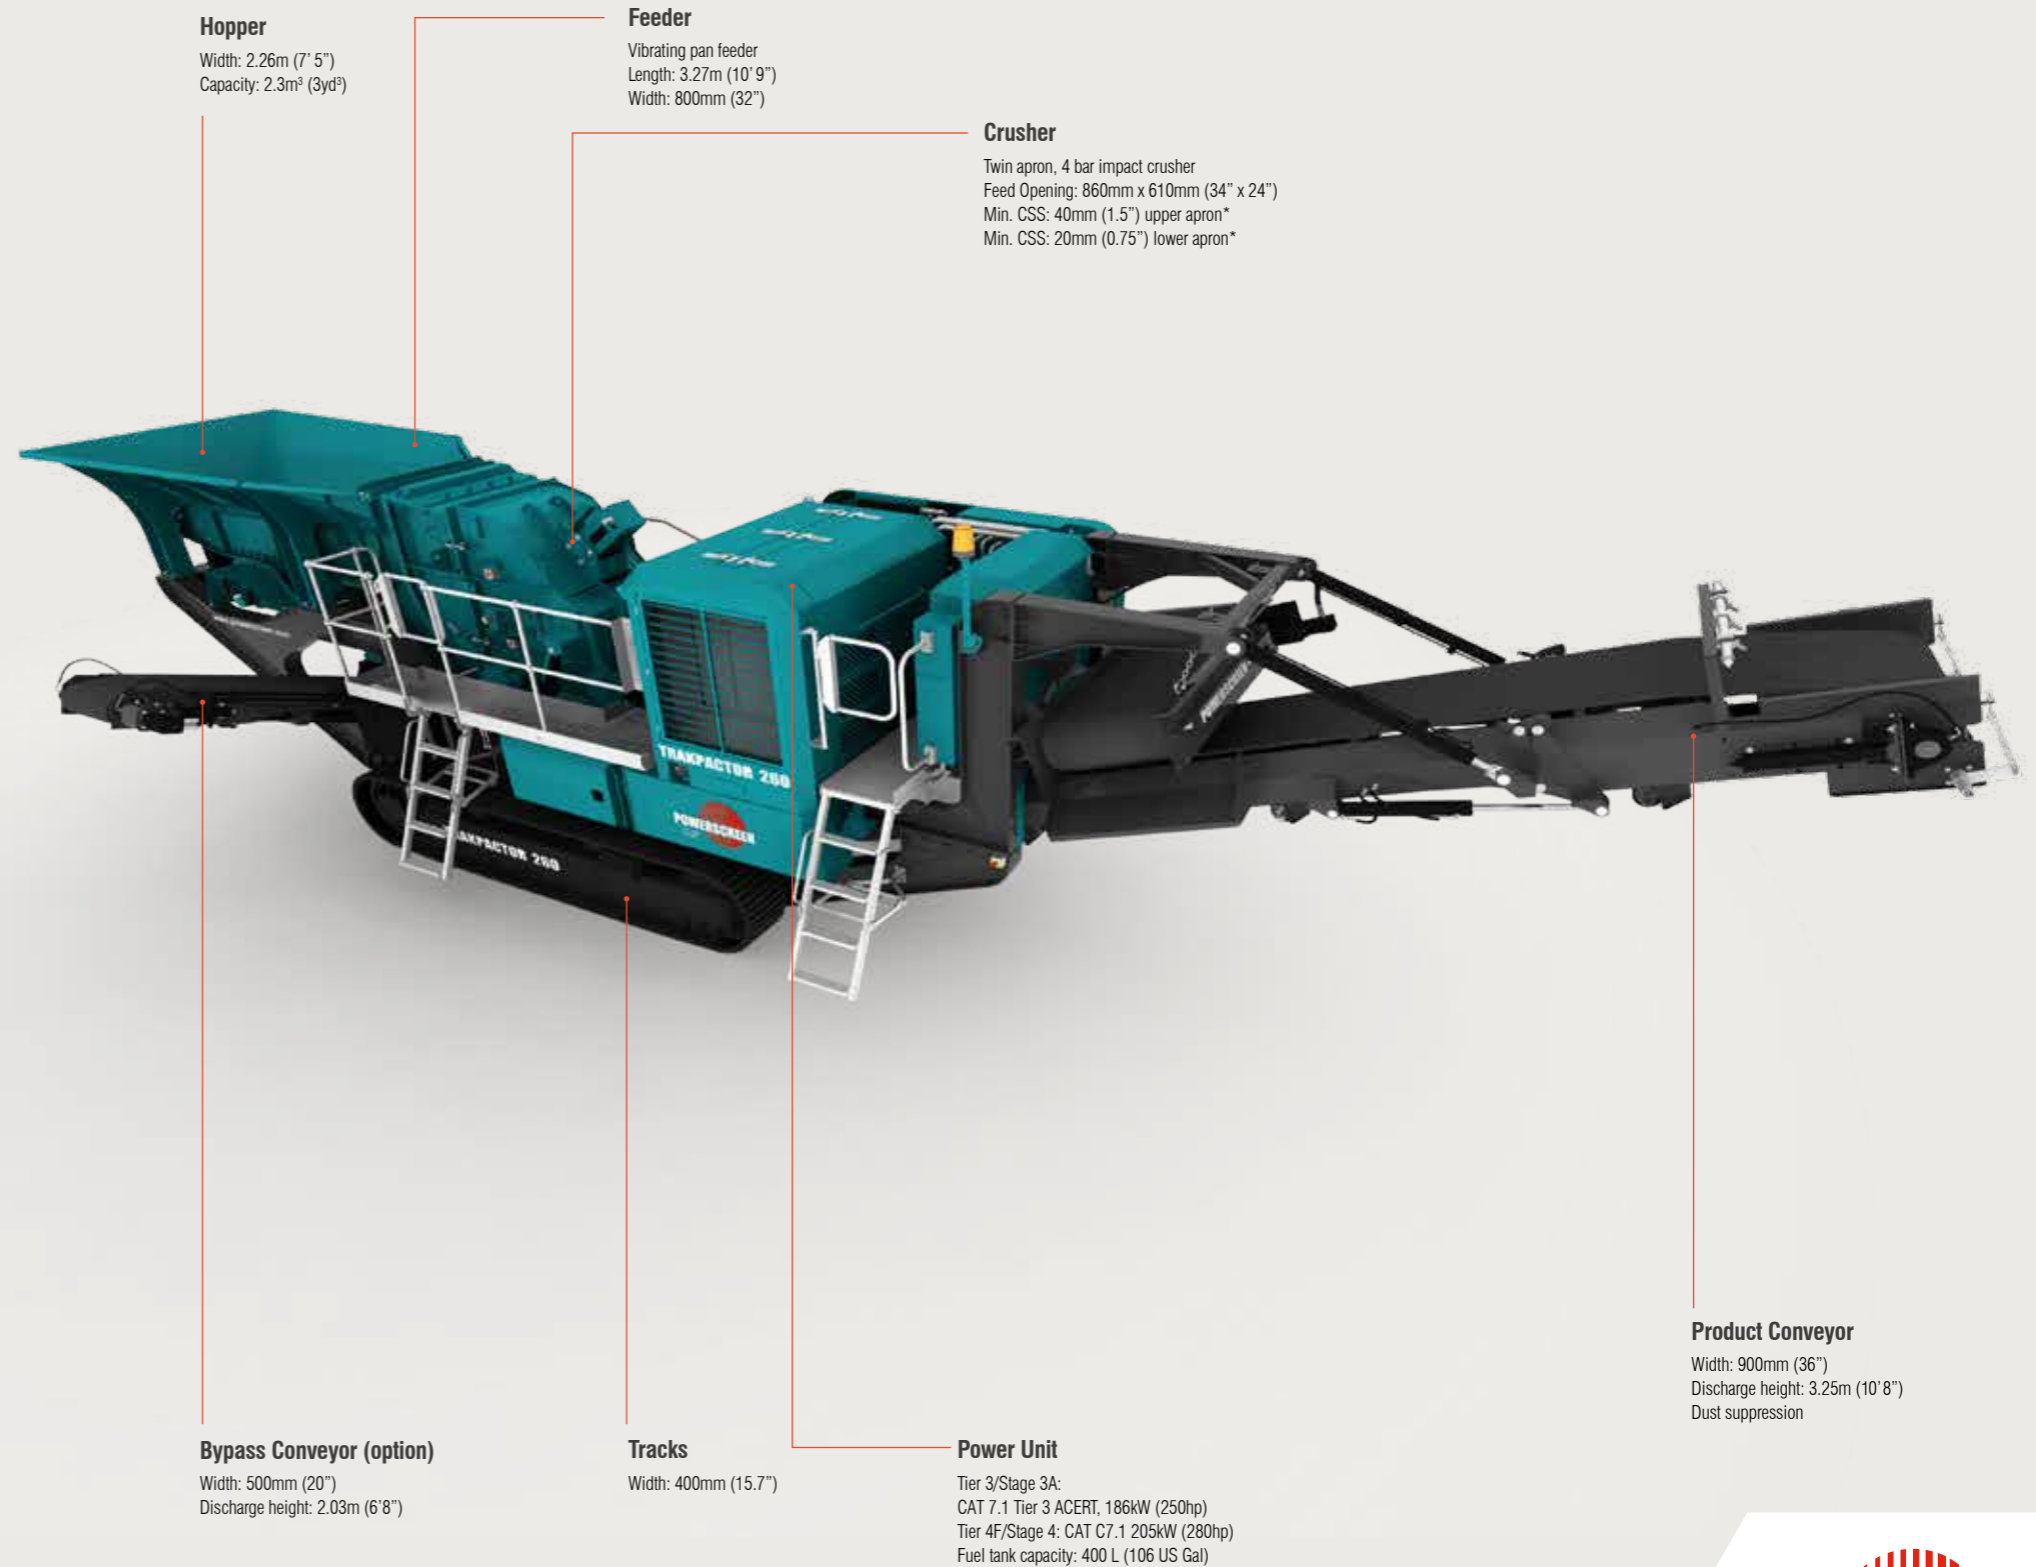

TRAKPACTOR 260SR

The Powerscreen® Trakpactor 260SR horizontal shaft impactor is a compact track mobile crusher designed for the recycling and demolition markets. Capable of processing a wide range of material at a high output, the plant is versatile, easy to operate and fuel efficient due to its direct drive system.

Featuring the Powerscreen® Trakpactor 260SR fixed hammer horizontal impactor, the plant offers users both excellent reduction and a high consistency of product shape alongside key features such as hydraulic overload protection.

Features & Benefits

- Replaceable tine bar cartridge style grizzly feeder
- Load management system to control feeder speed
- Crusher chamber: Patented hydraulic overload protection and adjustment system.
- 4 Bar rotor and twin apron design
- Economical to operate with HPTO clutch & highly fuel efficient direct drive system
- Crusher speed and conveyor height controlled with user-friendly PLC system
- Modular conveyor with raise/lower facility to aid clearance of rebar
- Dust suppression system
- Quick-detach post-screen to convert to standard Trakpactor 260
- Recirculating conveyor
- Fitted with Powerscreen Pulse Telematics system

Options


- Full and half size chrome, martensitic and ceramic blow bars
- 4 full size hammers in lieu of 2 full & 2 half hammers
- Various tine bar apertures
- Grizzly blanking mats
- Wire mesh for underscreen
- Single pole/twin pole magnet
- Belt scale
- Bypass conveyor
- Electric refuelling pump
- Plant lighting
- Radio remote control
- Hot/cold climate oil kits
- Blow Bar removal tool
- Control panel positive pressurisation
- Fully independent under crusher vibrating pan feeder

Applications

- Blasted rock
- River rock
- C & D waste
- Foundry waste
- Processed ores
- Processed minerals

TRAKPACTOR 260SR

Weight (Est)	33,950kg (74,847lbs) with bypass conveyor & magnet
Transport width	3m (9'10")
Transport length	14.8m (48'6")
Transport height	3.2m (10'6")
Working width	5.5m (18')
Working length	15.8m (51'8")
Working height	3.86m (12'7")

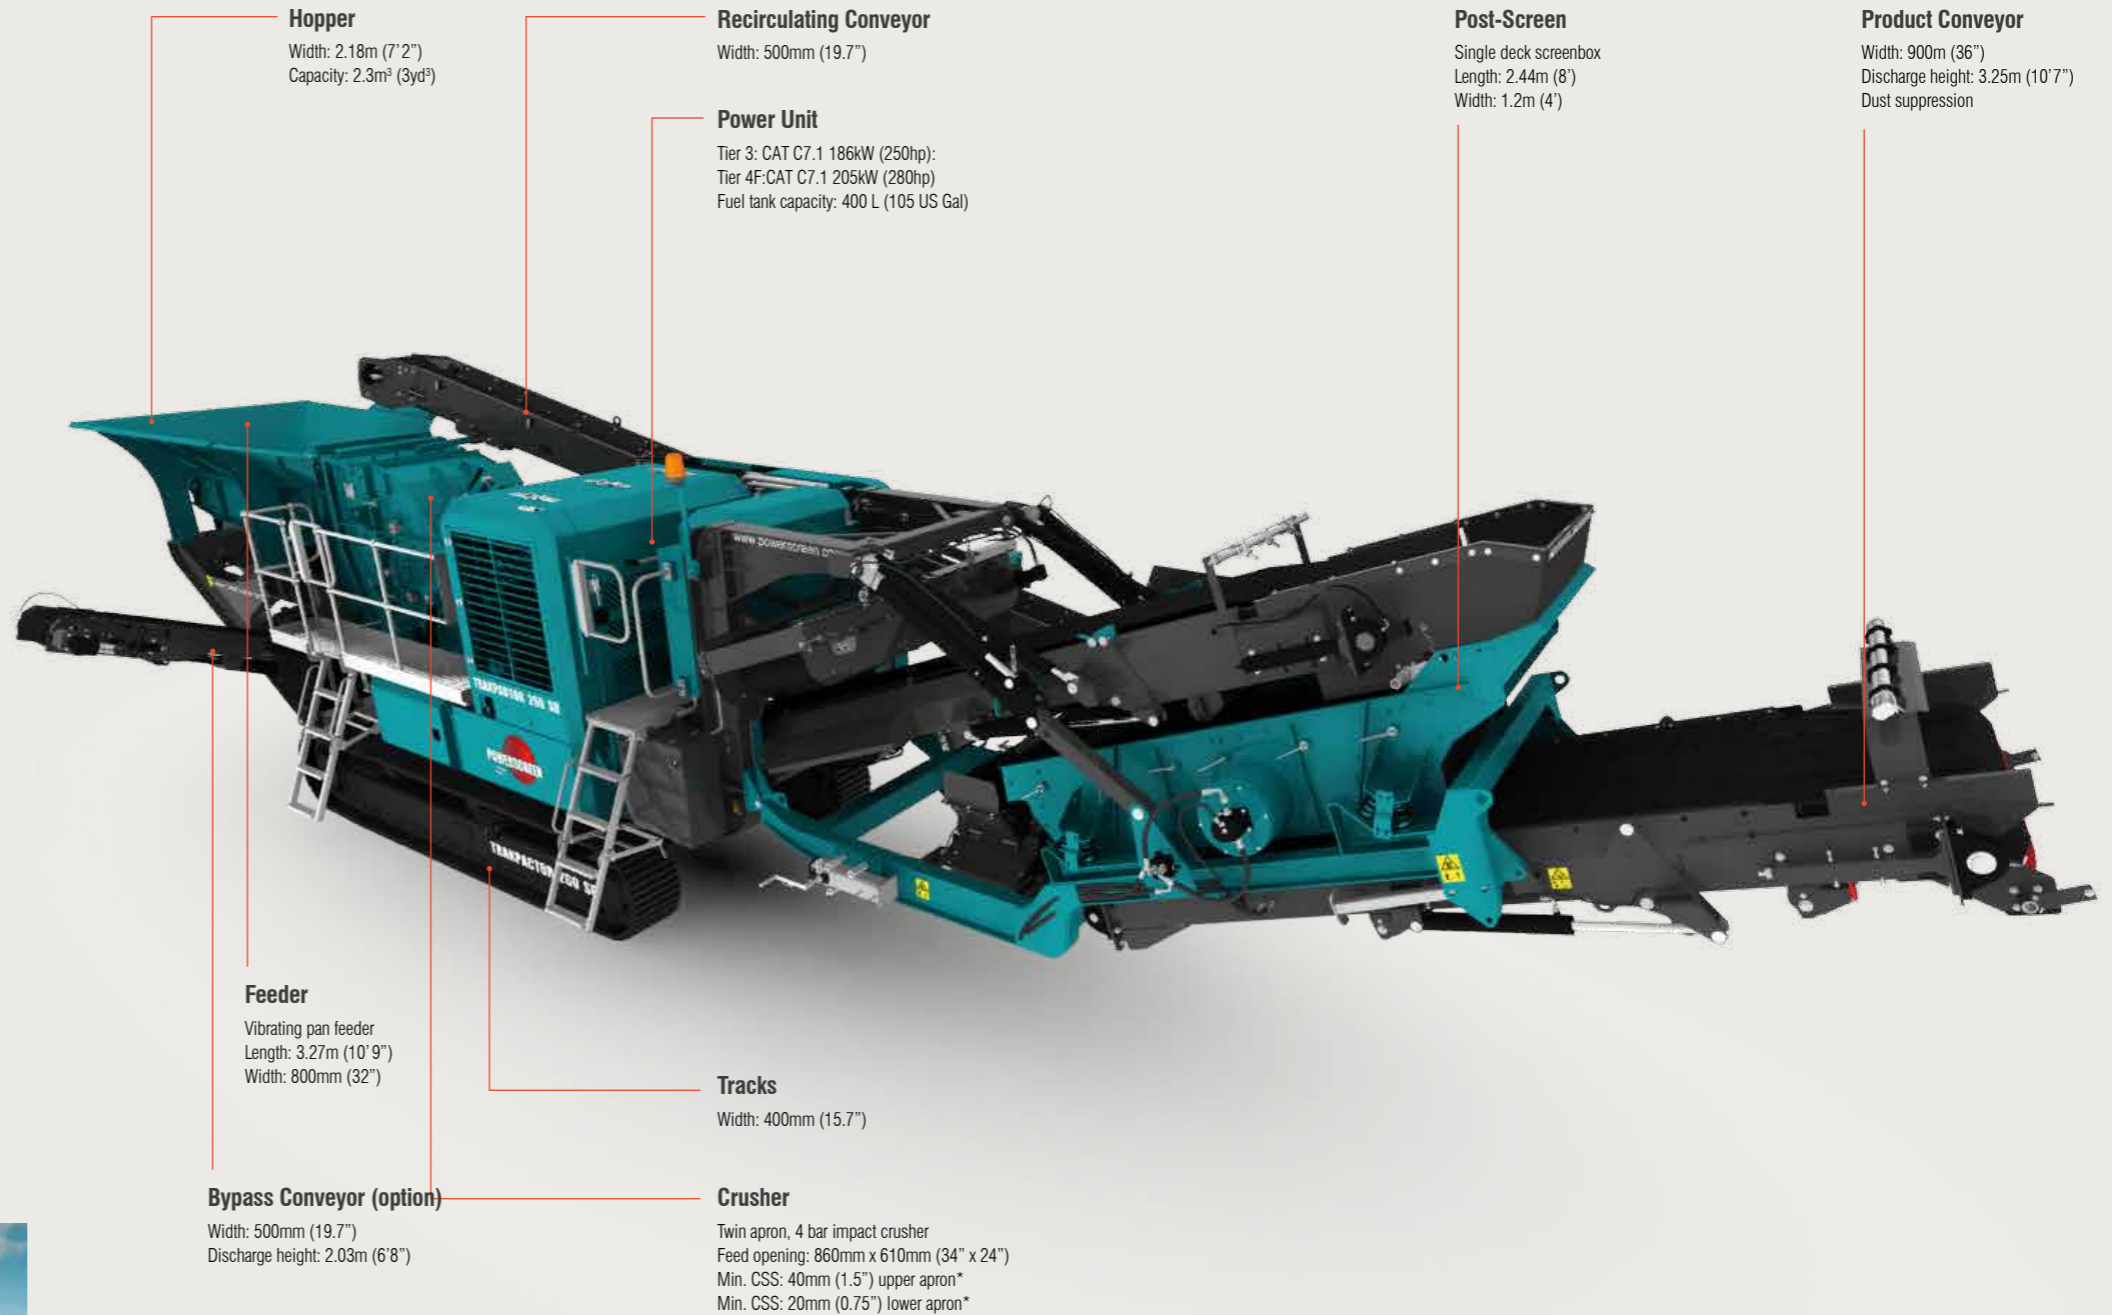

*Depends on application
Engines are available that are certified to US EPA and EU off road diesel emission standards. Talk to your dealer about possible certification options (i.e. Tier 3/Stage 3A, Tier 4/Stage 3B, Tier 4F / Stage 4).

