



PREMIERTRAK 330

The Powerscreen® Premiertrak 330 is high-performance primary jaw crushing plant, designed for operators in quarrying, demolition, recycling, and mining applications. The Premiertrak 330 boasts a two-piece grizzly feeder allowing better material flow towards the chamber. User benefits include track mobility for a quick set-up time, and variable crusher speed that allows the operator to fine tune the machine and maximize output.



✓ APPLICATIONS

AGGREGATE



Sand & gravel
Blasted rock
River rock

RECYCLING



C&D waste
Overburden
Foundry waste

MINING



Processed ores
Processed minerals

TECHNICAL HIGHLIGHTS ✓



INCREASED PRODUCTIVITY

- Superior tunnelling reduces the risk of rebar snagging giving excellent machine uptime.
- Enhanced material flow via new design bypass chute and product conveyor.
- Jaw level sensor option promotes material flow by optimising feeder speeds, increasing daily productivity.
- Powerscreen Pulse intelligent monitoring as standard.



VERSATILITY

- Ideal for C&D waste / recycling applications with hydraulic deflector plate and hydraulically raise / lower product conveyor options.
- Hydrostatic jaw chamber allows running in reverse which is advantageous in asphalt applications.



SERVICEABILITY

- Centralised low level hydraulics and electrics.



TECHNICAL SPECIFICATION



1 HOPPER

Fixed hopper as standard
Length: 4.46m (14' 8")
Width: 2.05m (6' 8")
Capacity: 5m³ (6.5 cu. yd.)

2 CRUSHER

High capacity single toggle jaw
Chamber size: 1000mm x 600mm
(39" x 24")
Min CSS: 40mm (1.5")
Max CSS: 125mm (5")

3 PRODUCT CONVEYOR

Width: 900mm (36")
Discharge height: 3.58m (11' 9")

4 FEEDER

Vibrating grizzly feeder
Length: 3.75m (12' 3")
Width: 0.94m (3')


5 TRACKS

Width: 400mm (15.7")

6 POWER UNIT

Tier 3/Stage 3A: John Deere 6068,
212kW (284hp)
Tier 4F/Stage 4: CAT C7.1, 205kW
(275hp)
Tier 4 / Stage V: CAT 7.1, 205kW
(275hp)
Fuel tank capacity: 640 L (169 US
GAL)

DIMENSIONS

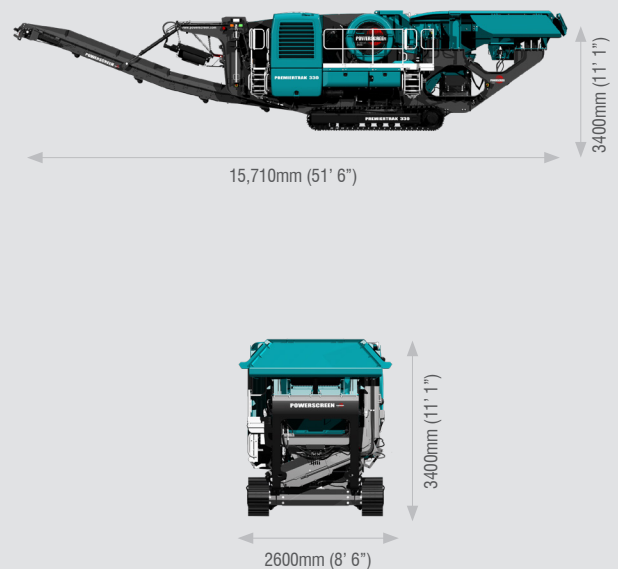

GET IN TOUCH

Dungannon
200 Coalisland Road, Dungannon,
Co Tyrone, BT71 4DR, Northern Ireland
Tel: +44 (0) 28 87 718 500
Fax: +44 (0) 28 87 747 231

Louisville
11001 Electron Drive,
Louisville, Kentucky, 40299 USA
Tel: +1 502 736 5200
Fax: +1 502 736 5202



www.powerscreen.com

The material in this document is for information only and is subject to change without notice. Powerscreen assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. Due to continual product development we reserve the right to change specifications without notice. Product performance figures given in this brochure are for guidance purposes only, this information does not constitute an expressed or implied warranty or guarantee, but shows test examples provided by Dealers. These results will vary depending on crusher chamber settings, screen media and sizes, feed source and types of material being processed. Photographs are for illustrative purposes only, some or all of the machines in the illustrations may be fitted with optional extras. Please check with your Dealer for details on optional extras. All machines are CE Approved.

Powerscreen® is a registered trademark of Terex GB Limited in the United States of America and many other countries. Copyright 2022 Terex GB Limited. Published and Printed in October 2022.